

## AH-1100 Preamplifier

The AH-1100 Preamplifier is the next generation after the legendary workhorse in the ultrasound measurement laboratory, the AH-17dB. This new low noise design has even flatter response than its predecessor and high reliability SMA connectors to maintain its place as the best all-around amplifier for any ultrasound acoustic intensity measurement.

### Features

- Low cost
- Flat frequency response
- Reliable
- High dynamic range (> 80 dB)

### Technical Specifications

- Voltage Gain:  $20 \pm 1$  dB into  $50 \Omega$  from 5 KHz to 25 MHz
- Input Impedance:  $10 M\Omega$  in parallel with 7 pF
- Max Output into  $50 \Omega$ : 4 Vpp
- Power Consumption: 0.7 W

\* This amplifier is not submersible, a waterproof cable is needed to connect to the hydrophone. The cable length affects the overall gain and hence the calibration of your hydrophone

Specifications are subject to change without notice.




AH-1100 Preamplifier




Amplifier is supplied as a kit with signal cables and universal power supply (plug configurations available for all countries).

## Typical Gain Plots

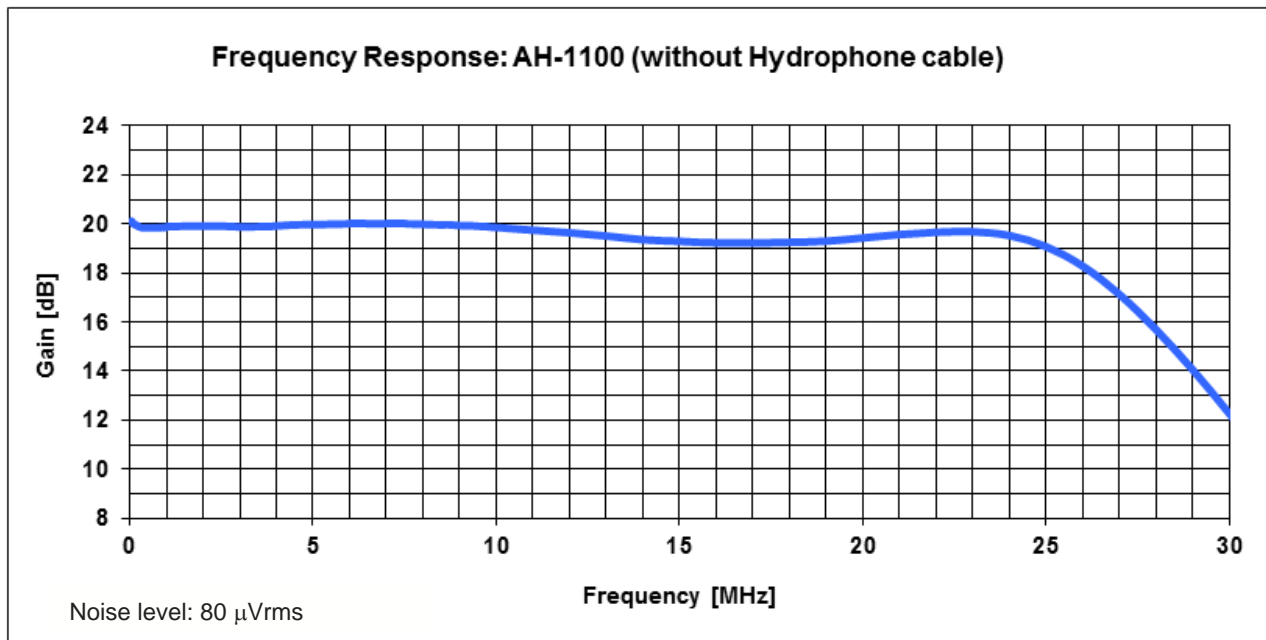

## Mechanical Specifications

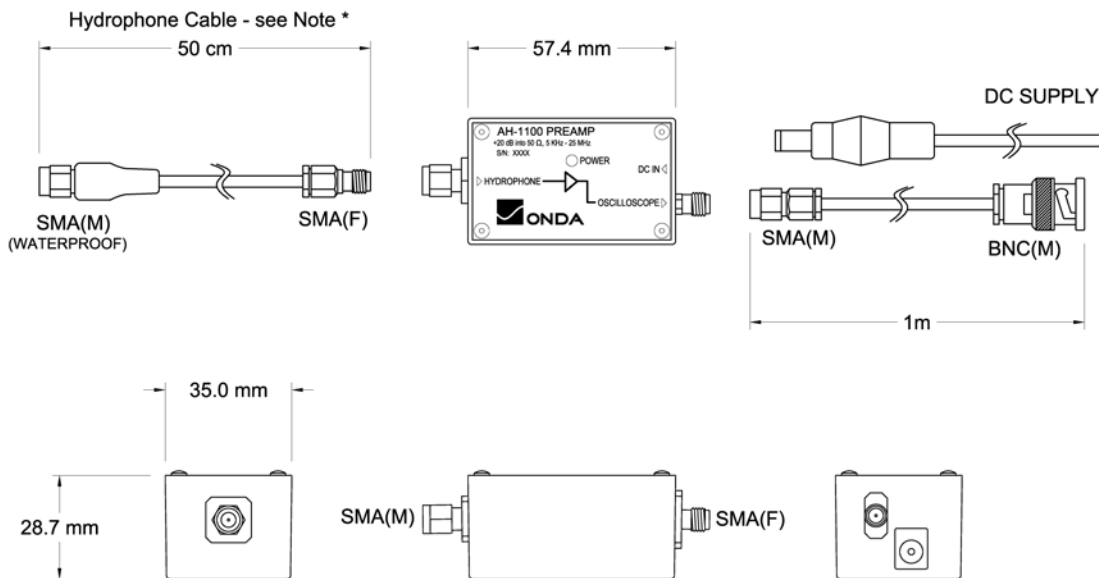

Weight (amplifier without cables): 58 g

\* Note: 20 cm and 100 cm submersible cables available upon request.

This amplifier is not submersible. For submersible amplifiers, see the AH-2000 Series.